
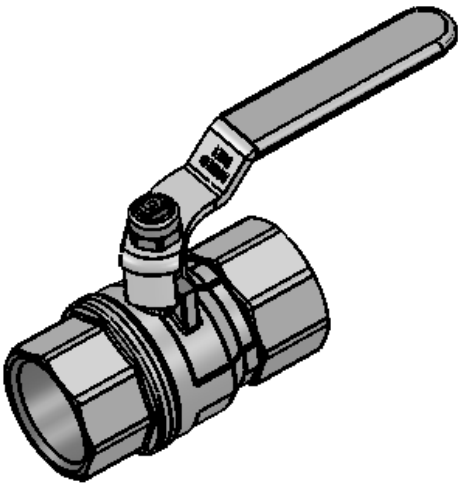
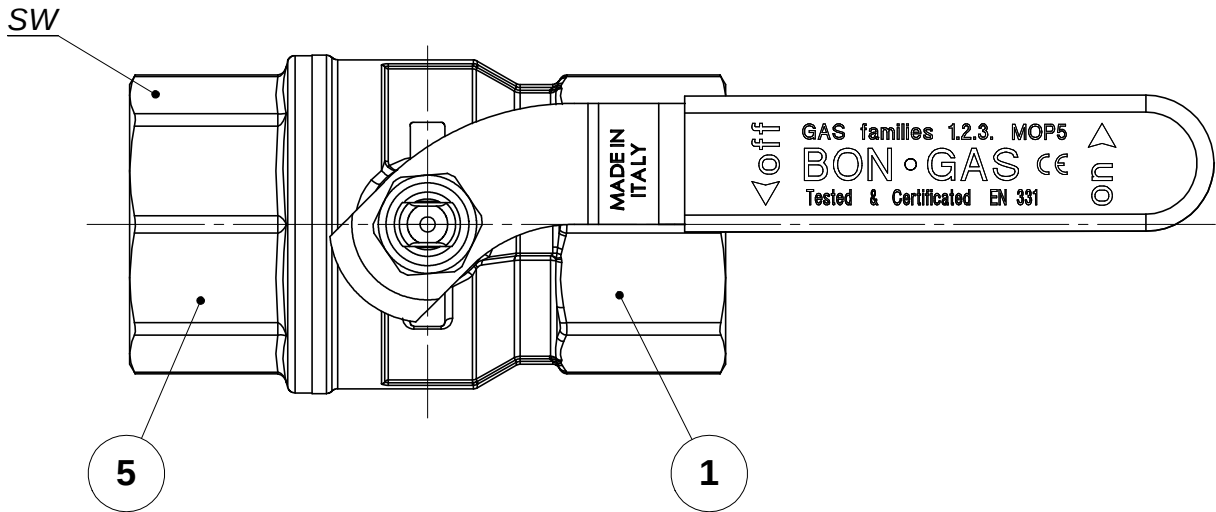


S Componente di sicurezza con conservazione obbligatoria delle documentazioni.
Le caratteristiche comprese tra *....* riguardano la sicurezza.
Questo disegno contiene N°1 caratteristiche di sicurezza

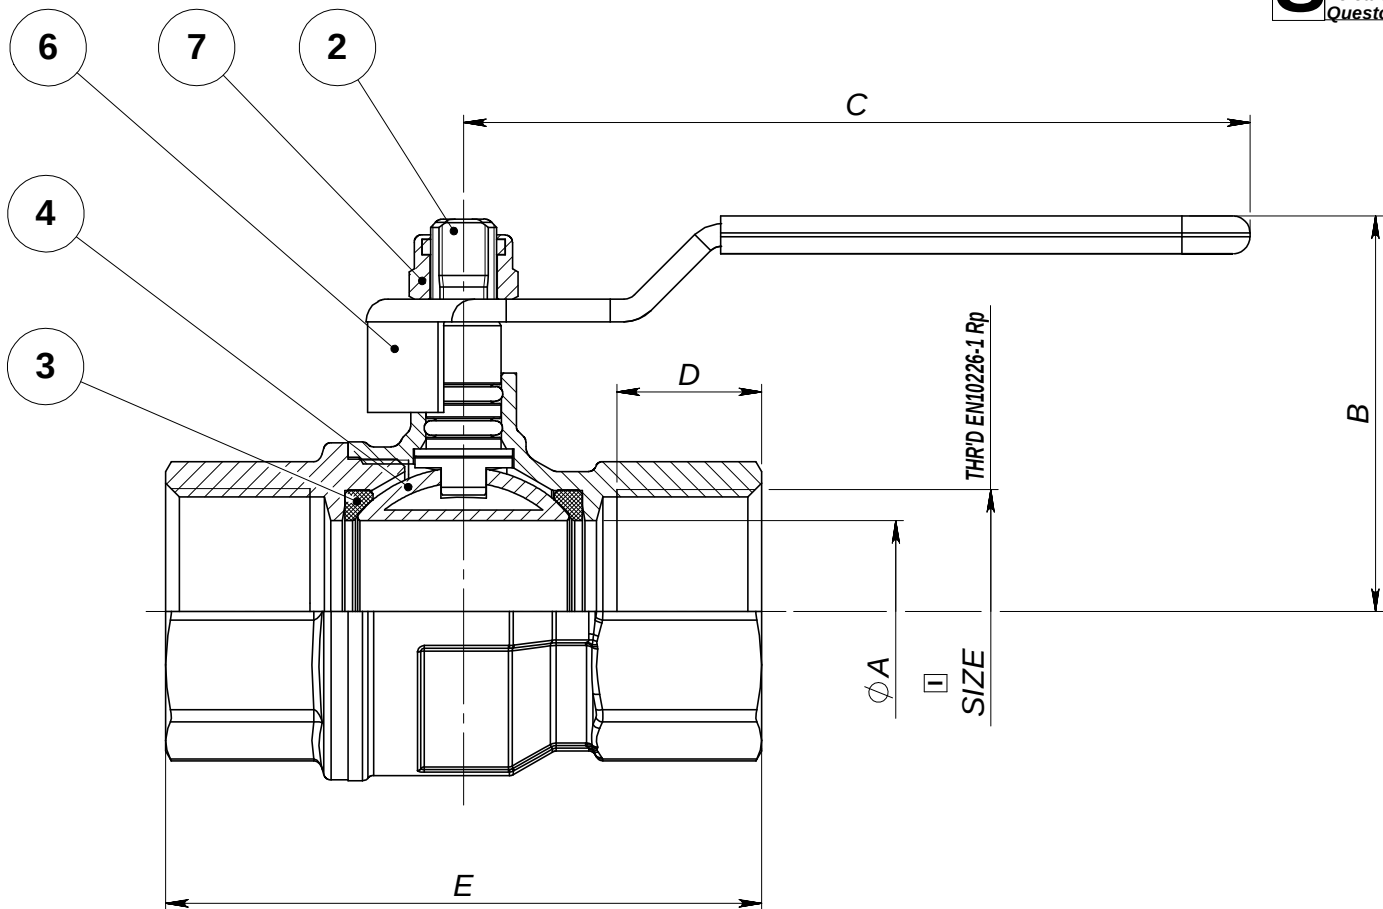

G0231N39	2"	50	50	77.5	140	25.7	123.5										66	25
G0231N38	1"1/2	40	40	67.5	120	21.4	101										53	25
G0231N37	1"1/4	32	32	59	105	21.4	91.5										46	25
G0231N36	1"	25	25	52	105	19.1	80										37	25
G0231N35	3/4"	20	20	42	90	16.3	64										30	25
G0231N34	1/2"	15	15	40	75	15	56.5										24	25
CODICE - CODE	MISURA - SIZE	DN	Ø A	B	C	D	E	F	G	H	I	L	M				SW	PN

CARATTERISTICHE - FEATURES								ASSEMBLY & TESTING SPECS	N°	Descrption	Material	Q.tà
DIREZIONE FLUSSO - FLOW DIRECTION		IN THE BOTH WAYS						EGA.004	1	BODY	CW617N (EGM.001)	1
MANOVRA - OPERATION		STEM ROTATION OF 90°						EGA.005	2	PRE-ASSEMBLED STEM	VARIOUS	1
ESTREMITA' - ENDS		FEMALE/FEMALE THR'D ISO 7/1 Rp.						EGA.009		STEM	CW614L(EGM.002)	1
DISPOSITIVO BLOCCAGGIO - LOCKING DEVICE										O-RING	NBR(1/2"e3/4")/HNBR	2
SIGILLANTE - SEAL		LOCTITE AVX (EG.022)								THRUST WASHER	PTFE (EGM.009)	1
LUBRIFICANTE - LUBRICANT		GREASE (EGM.025)							3	BALL GASKET	PTFE(EGM.009)	2
LIMITI DI PRESSIONE - PRESSURE LIMITS		FOR GAS: MOP5 - FOR OTHER USES: SEE TAB							4	BALL	CW617N(EGM.001)	1
LIMITI DI TEMPERATURA - TEMPERATURE LIMITS		FOR GAS: -20°C +60°C - FOR OTHER USES: -20°C +100°C						EGP.015	5	END-ADAPTER	CW617N(EGM.001)	1
IMPIEGHI - SERVICES		HOT AND COLD WATER, COMPRESSED AIR, OILS NON AGGRESSIVE MEDIA AND GAS FAMILY 1-2-3						EGP.016	6	YELLOW STEEL LEVER	STEEL(EGM.007)	1
									7	SELF-LOCKING NUT	STEEL (EGM.020)	1
NORME DI RIFERIMENTO - SPECIFICATION N°		EN 12164/12165 - EN331 - EN 10226 - 97/23 CE										

D					E					F				
A					B					C				
Simb	Data	N° Mod.	Firma	Approvato	Simb	Data	N° Mod.	Firma	Approvato	Simb	Data	N° Mod.	Firma	Approvato
Sostituisce il:			Tolleranze Generali da applicare:			12.5 Q=12,5 micron (Stampaggio) 3.2/ √=3,2 micron (Tornitura) 0.8/ √=0,8 micron (Diamantatura)			Stato: ASSEMBLED			Disegnato: Roberto Gobbi		
			TOLLERANZE PER LAV. MECCANICHE norma EGD.002						Materiale: VARIOUS			Approvato:		
QUOTE			ANGOLI			CONCENTRICITA'								
Sostituito dal:			TOLLERANZE mm			°			0,2			0,2x45°		
☐ 1 ☒ 2 ☐ 3 Contrassegno di Sicurezza 						Questo disegno non puo' essere usato in nessun modo, ne' essere reso noto a terzi, senza previa autorizzazione scritta della ENOLGAS BONOMI s.p.a.			Particolare : BALL VALVE FEMALE/FEMALE THR'D			Serie : BONGAS(NEW)		
 ENOLGAS CONCESIO Via Europa, 227 ITALY			Formato A3			This drawing must not be used in any manner unless prior written authority is received from ENOLGAS BONOMI s.p.a.			EN10226-1 Rp WITH YELLOW LEVER			Misura : VARIOUS		
												N° Cod. G0231N3-		