
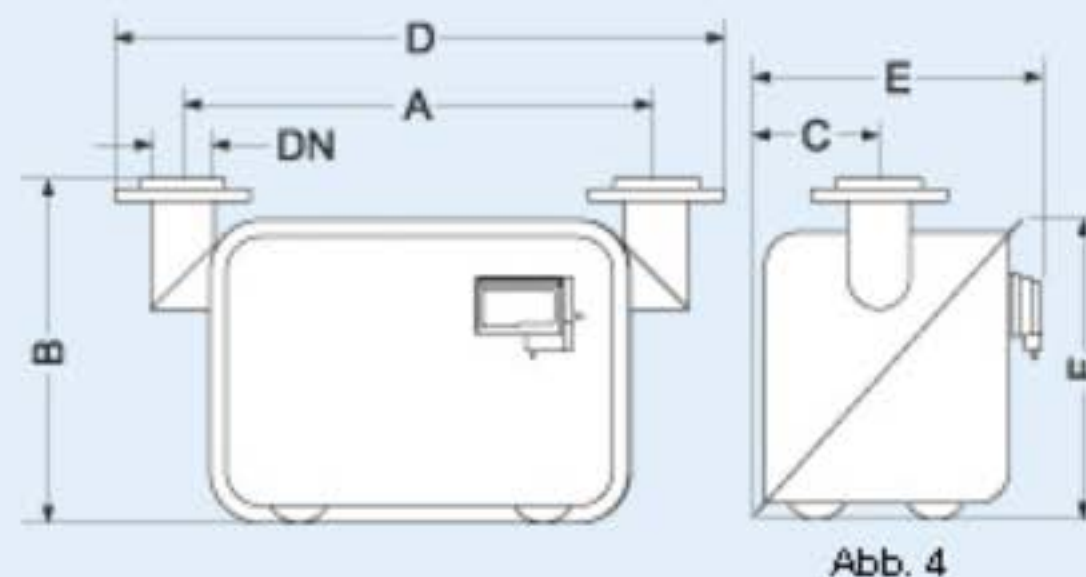
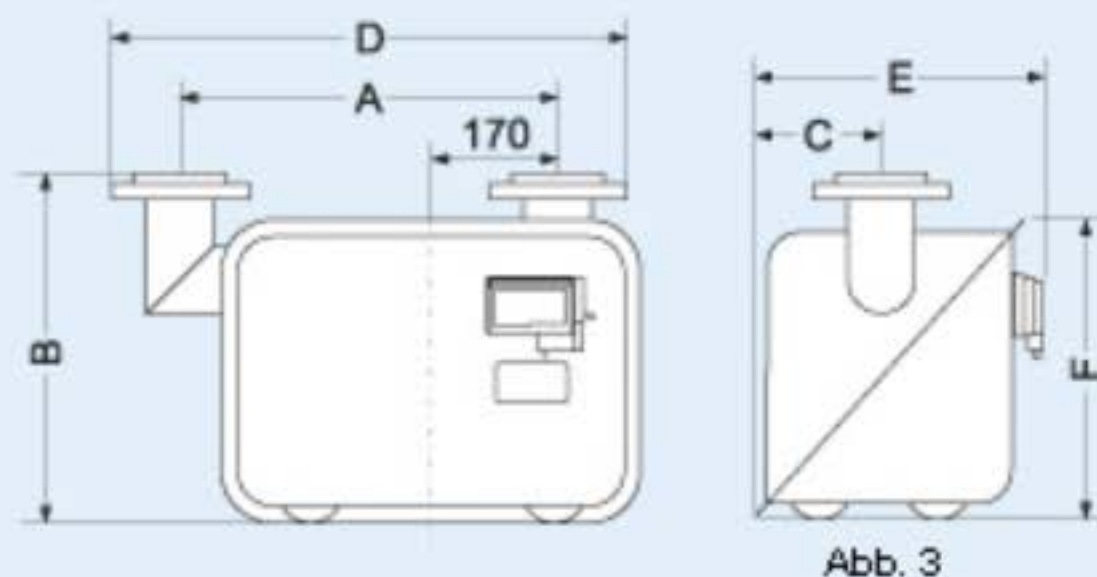
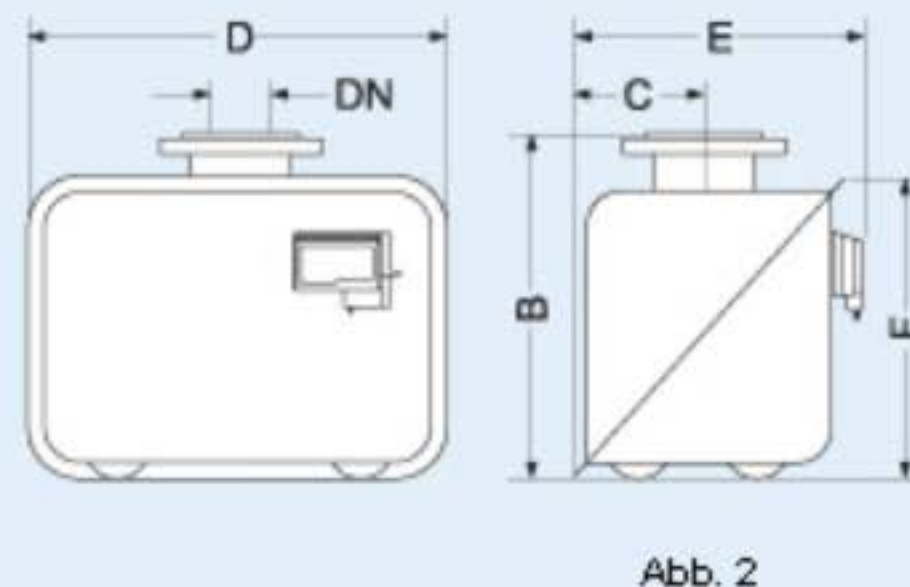


BK-G 40 / 65 und BK-G 40T / 65T

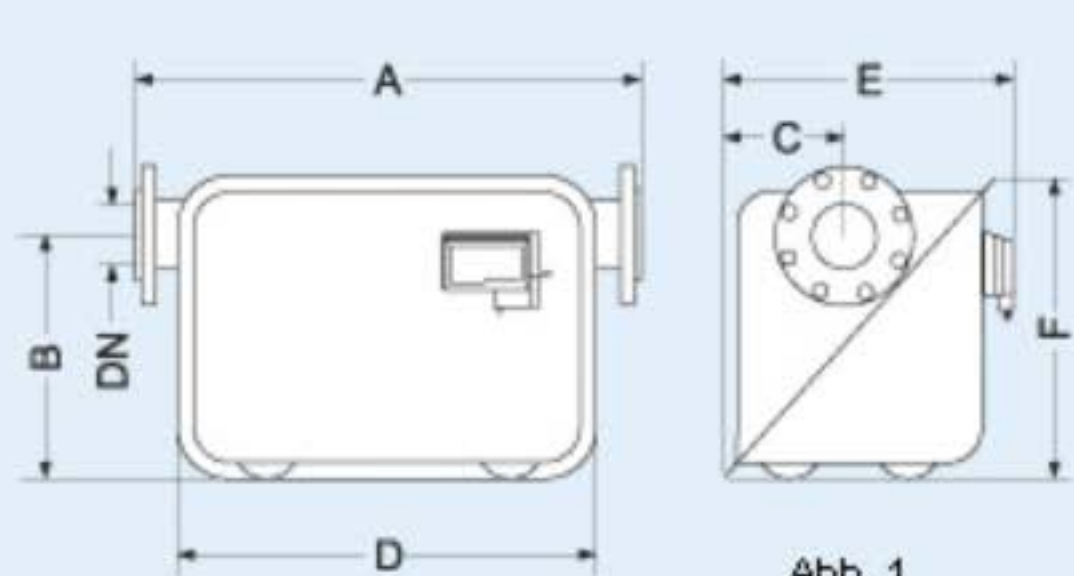

Typ	Abb.	$Q_{\max}$	$Q_{\min}$	V	Anschluss- flansch***		Abmessungen						Gewicht
		m ³ /h	m ³ /h		Standard	Optional	A****	B	C	D	E	F	
BK-G40	1	65	0,40	18	DN 80	DN 65	570	327	161	564	392	403	28
BK-G40	2	65	0,40	18	DN 80**	DN 65**	-	470	175	564	392	403	26
BK-G40	3	65	0,40	18	DN 80	DN 65	510	470	175	710*	392	403	29
BK-G65	1	100	0,65	24	DN 80	DN 100	680	327	161	564	392	403	29
BK-G65	2	100	0,65	24	DN 80**	-	-	470	175	564	392	403	28
BK-G65	4	100	0,65	24	DN 80	DN 100	640	460	161	840*	392	403	32

* für DN 80 ** nach DIN 3376 *** Flansche und Bunde nach DIN 2642, PN10 **** andere Abmessungen auf Anfrage